

PVC CLEAR GLOSS 80 PF-1 CB74

F6X5PEDFSA

Edition: 3

Date of approval: 04/02/2016

Belongs to the collections

- ADHOC ROLL

Technical datasheet

Face material

Reference	PVC CLEAR GLOSS 80
General characteristics	Transparent gloss, vinyl plasticated, cadmium free film.
Grammage (gr/m ²) ISO 536	104
Thickness (µm) ISO 534	80


Adhesive

Reference	PF-1
General characteristics	Permanent acrylic water based adhesive. Specially developed for synthetic face materials due to its excellent clarity. Good adhesion to non-polar surfaces. The research centre ISEGA has given the adhesive PF-1 approval according to the European requirements for direct contact with dry, moist and such kind of fatty foodstuffs which have a correction factor of at least 3 according to the Regulation (EU) N°10/2011. Approved for UNI-EN 71/3 "toys security" norms and conformed to the FDA, 21 CFR Ch.I (April 1, 2013 edition) 175.105.
Tack (N) glass FTM-9	>6
Cohesion (h) 1kg FTM-8	>6
Labelling temperature (°C)	+5
Usage temperature (°C)	-10/+80

Support

Reference	CB74
General characteristics	Supercalendered glassine paper, colour: white. There may be slight variations in tone.
Grammage (gr/m ²) ISO 536	72
Thickness (µm) ISO 534	62
Transparency (%) ISO 2469	42
Tensile strength MD/CD (KN/m) ISO 1924	MD>6,2 / CD>3

Schemes

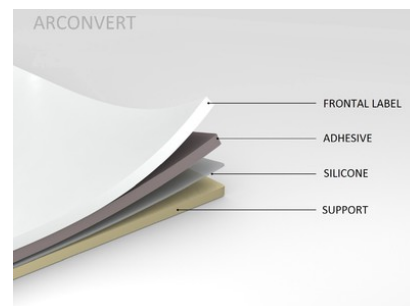

Uses and applications

Product designed for advertising and decorative labels. Good resistance to laceration and excellent flexibility. Good print results using silk-screen and offset with UV quick drying inks.

Shelf life

2 years, under storage conditions as defined by FINAT section 2.5 (20-25°C, 40-50% RH).

The technical specifications given are general in nature and based on our knowledge, for which reason the suitability of our products for the end use to which they are put cannot be guaranteed. It is the purchaser's responsibility to assess, test and ensure the suitability of each product for their end use through their own prior approval process; Arconvert S.p.A. cannot therefore be held responsible for unsuitable end use of its products. These technical product specifications supersede all previous editions. All information is subject to change without prior notice.